

**To: Student Sustainability Committee
University of Illinois at Urbana-Champaign**

From: Ruth A. Green, Plant Care Facility Coordinator

Date: March 31, 2010

**Re: Proposal for Energy/Shade Curtains for the Plant Sciences Laboratory
Greenhouses**

Project Lead Contact Information

Name: Ruth A. Green Phone: 217-333-3058
E-mail: rgreen6@illinois.edu Address: 1222 PSL, MC-634
1201 S. Dorner Drive
Urbana, IL 61801

Title: Plant Care Facility Coordinator
Organization/Department: Plant Care Facility (unit), Office of Research (Dept.)

Secondary Contact Information

Name: Ralf Moller Phone: 217-333-0242
E-mail: rmoller@illinois.edu Address: 220 Mumford Hall, MC-710
1301 W. Gregory Drive
Urbana, IL 61801

Title: Director of Operations
Organization/Department: College of Agricultural, Consumer and Environmental
Sciences, University of Illinois at Urbana-Champaign

Unit Financial Officer Contact

Name: Natalie Bush Phone: 217-244-2842
E-mail: mcb@illinois.edu Address: 118 Mumford Hall, MC-710
1301 W. Gregory Drive
Title: Financial Operations Manager
Organization/Department: ACES Administration Urbana, IL 61801

I. Detailed Project Description:

**Installation of Energy/Shade Curtains in the Plant Sciences Laboratory (PSL)
Greenhouse**

A. Project Goals

1. Decrease energy usage to heat the greenhouse rooms
2. Decrease energy usage to cool the greenhouse rooms
3. Increase natural light quality in the greenhouse rooms
4. Decrease energy usage by the application and removal of whitewash

B. Definition of sustainability and the relationship of the project to this definition.

According to your website, you state that sustainability encompasses economic, environmental, and social practices that meet the needs of current generations without jeopardizing the ability of future generations to meet theirs.

Our project would meet this definition by reducing the amount of energy required to heat, cool and light the greenhouse rooms year round. It would be sustainable economically, by reducing the University of Illinois' energy costs in the long term. It would be sustainable environmentally by emitting fewer pounds of carbon dioxide. This project would:

- 1) Reduce our use of steam energy provided by Abbott Power Plant to heat the greenhouses in the winter;
- 2) Reduce the use of electricity by our supply and exhaust fans (louvers are pneumatic);
- 3) Reduce our use of high intensity lighting (electricity) by providing the highest quality of natural daylight inside the greenhouse rooms year round; and,
- 4) Eliminate the energy used to apply whitewash in May and whitewash remover in October, in addition to the cost of materials and labor to do these applications.

C. Feasibility evaluation. (Not applicable)

D. Longevity and/or permanence of project results on campus.

The energy/shade curtain material normally lasts 7-10 years. Then, the material will need to be replaced due to heat and UV deterioration. The curtain material is the least expensive component of the curtain installation. The results of this project will be a continued reduction of energy use by the PSL Greenhouse, both steam and electricity. This will only increase as more curtains are installed.

E. Project governance structure (if applicable) (Not applicable)

F. A Summary of communication with relevant campus administrative entities and Facilities & Services personnel.

Keith Erickson provided the energy costs for steam for my calculations. They fully support the installation of energy/shade curtains in the greenhouses. They are aware of the significant energy savings these curtains provide in the long term.

G. Location

The PSL Greenhouse is located at 1201 South Dorner Drive, Urbana, Illinois. The College of ACES has already installed shade/energy curtains in 18 of the 64 greenhouse rooms. Facilities and Services (F&S) have approved the new construction we have done thus far.

H. If applicable, comparisons to similar projects at other campuses.

State of the art institutional/research greenhouses constructed today all have energy/shade curtains to reduce energy consumption needed for heating and cooling. They also install them to provide the highest quality of natural light levels to reduce the use of high intensity lighting year round.

II. Budget & Fundraising:

1. Detailed budget.

Energy/shade curtains cost, approximately, \$12,000 per room to install, including materials and labor. The XLS15 Revolux curtain material made by LS is for energy savings and shading (see attachment). Installation includes the drive shaft, a reversible motor, stainless steel and nylon support cables, all structural and mechanical components to mount the curtain system and motor, and a controller to connect it to the existing computer-automated greenhouse control system (Argus). There will be additional costs for Argus override switches and software which has averaged \$100.00 per room. There will also be electrical costs to connect the shade curtain motor to the Argus Control System. This has averaged approximately \$1350.00 per room.

We are requesting funding for a total of nine (9) greenhouse rooms (3 ranges):

Energy/shade curtains, material and labor:	\$108,000.00 (\$12,000.00 per room)
Argus Control System relays and software:	900.00 (\$100.00 per room)
Electrical wiring to connect motor to controls:	12,150.00 (\$1350.00 per room)
Total costs:	\$121,050.00

Life-cycle operation and maintenance costs would consist of the operation of a 24-volt signal from the Argus Control System telling the curtain motor to open or close. It is an integrated control system that monitors the room temperature, outside light levels and desired light intensity setting for the crop being grown, and decides if it will continue to open or close the curtains in order to maintain the desired light levels and temperature settings. Annual maintenance includes checking that all of the support cables are tight and the motor is not leaking oil.

We would like to install energy/shade curtains in ranges 1400, 1500 and 1600 on the west side of the PSL Greenhouse. There are three rooms in each range and each room is 25 feet wide and 50 feet long. Thus, there are nine (9) rooms all the same in size. The knee wall is 3 feet tall, the gutter height is 10 feet tall, the ridge height is 17.5 feet tall and the tempered glass is 1/8 inch thick with a 6/12 pitch.

Without funding from the committee, this project will not be able to move forward. Our allocation of maintenance funds for the PSL and Turner Hall Greenhouses has decreased annually from \$131,000.00 in 2001 to \$87,000.00 in 2009. These maintenance funds are used for all repairs and maintenance of existing greenhouse equipment for 100 greenhouse rooms, totaling ~ 90,000 square feet of greenhouse space in the PSL and Turner Hall Greenhouses, excluding the new USDA addition. We have been able to upgrade, approximately, five (5) rooms per year since FY06. Facilities and Services have supported the installation of this new equipment. However, in FY10, we had other costly repairs that took precedence over this upgrade project. Given the state budget situation, it is expected that additional state budget cuts are coming for FY11. Therefore, this will halt the progress of this upgrade project.

2. Fundraising

Currently, as stated above, the College of ACES allocates, approximately, \$87,000 per year for maintenance, repairs and upgrades for the PSL and Turner Hall Greenhouses. We did apply for a grant from the Specialty Growers of Illinois in FY05 and were awarded \$10,000.00 to replace the blackout curtains in one of the rooms in the

Turner Hall Greenhouse which had completely failed. We have been looking for other funding/granting opportunities since that time. We also have funds available through the PCF Service Account as “matching funds” which many granting agencies require. The PCF Advisory Committee just approved a greenhouse service fee increase that will take effect on July 1, 2010. These funds could help repay this interest-free loan.

We request that the SSC consider our request for an interest-free loan to cover the installation of energy/shade curtains with seals to nine greenhouse rooms to keep this energy savings upgrade moving forward. This will be dependent upon the College of ACES actually receiving funds for the energy saved in FY11 and beyond. If the College of ACES does not receive any funds; then, we would like to reconsider the proposed number of rooms upgraded in FY11. The number of rooms could be decreased to "0" due to the uncertainty and the unclear campus policy in this matter.

III. Timeline

A. Detailed Timeline

Our project is dependent on the receipt of funding from this committee. If the University of Illinois experiences additional state budget cuts, the amount of maintenance funds allocated per year could continue to decline, thus, decreasing our ability to pay for these long-term energy upgrades. Our greenhouse facilities are only getting older, and will require more repairs and/or replacement of equipment, not less.

Normally, we do these installations in March or April because we need them fully operational by May. It normally takes the contractor one week to install five curtain systems. It takes another week for the electrical work to be done to connect the new curtain motor to the Argus Control System. Therefore, to install nine new curtain systems may take a total of one month.

For example, the last five rooms were done starting on April 27, 2009, and the contractor planned to be done on Friday, May 1, 2009. Our F&S electrician started the electrical work on May 4, 2009, and completed the wiring by May 10, 2009. Our target start and end dates for this installation would be April 12 to May 7, 2011.

IV. Energy, Environmental, Social and Economic Impact

A. Renewable Energy Projects – Not applicable.

B. Energy Efficiency Projects – Applicable.

a. We tried to obtain energy usage costs for the PSL Greenhouse from 2003 to 2008 from F&S. Because of a faulty steam valve meter, F&S did not have any steam use data for the PSL Greenhouse, individually. We were able to obtain energy use data for the entire Plant Sciences Laboratory Building from June 2009 to February 2010.

See energy usage attached.

Based on industry standards, shade and/or energy curtains can save, approximately, 20-55% in energy use depending upon the type of material used and how it is installed. We estimate that the energy savings by installing energy/shade curtains in three ranges of rooms in the PSL Greenhouse will average approximately 15-21% energy

savings. **This is a conservative estimate.** As of May 1, 2009, we have energy/shade curtains in three ranges of the PSL Greenhouse including 18 of the 64 greenhouse rooms.

According to the energy estimates attached, we would be able to save 141 klb of steam per room or 1267 klb of steam for 9 rooms. This is equal to a 21% savings in steam used to heat these 9 greenhouse rooms. This would eliminate 310,288 lb. of carbon dioxide emissions per year. In dollars, we would save \$2.22 per square foot which equals \$2775.00 per room. Thus, this would be a yearly savings of \$24,975 for all 9 rooms. This is equivalent to a 21% savings in energy costs.

b. The curtain systems themselves need electricity to power a reversible motor which draws 1 amp (equivalent to a 100 watt bulb, as per Tom Weber with F&S) and the controller connected to the greenhouse environmental control system (Argus). Argus sends out a 24-volt signal to the relay which signals the curtain motor to open or close the curtain based upon room temperature, outside light levels and the light intensity required by the crop being grown. Argus is an integrated system which monitors all of these factors every 10-15 minutes. This is done to minimize wear and tear on the equipment. The motor runs, approximately, 30 seconds to open or close the curtain.

In addition to saving on steam usage, these energy/shade curtains also save on cooling costs, because they reduce indoor light intensity and help control room temperatures during the day. This reduces the amount of electricity used by the supply and exhaust fans, and the use of high intensity lighting (HID lights). On a rainy or cloudy day, the curtains would remain wide open to provide the maximum amount of natural daylight. The same room with whitewash would be extremely dark which would cause the HID lights to run more hours per day than a room with energy/shade curtains. I do not have any electrical data as proof since we do not have any electrical meters for any individual greenhouse rooms with and without curtains.

Also, the installation of energy/shade curtains eliminates the recurring cost of materials, labor, and electrical energy to apply and remove whitewash. This costs the Plant Care Facility (PCF), approximately, \$3,000.00 per year in materials and 40 labor hours to apply the whitewash in May and another 40 labor hours to apply the whitewash remover in October. That is a total of 80 hours of labor which averages about \$1,800.00 per year. The whitewash is applied using a 15-gallon electrical sprayer.

c. We believe the net amount of energy saved would be a **minimum of 20%** per year because of the combined savings in steam and electrical usage. These savings would continue to increase on an annual basis as more curtains are installed.

C. All Projects

a. Environmental Impact

If we were able to save 1267 klbs of steam annually, this would reduce carbon dioxide emissions by 310,288 lb. per year.

b. Social Impact

The greenhouses serve the needs of researchers and faculty who teach and conduct plant laboratories inside the greenhouse. The energy/shade curtains make the greenhouse rooms a more pleasant environment in which to work by keeping the room temperatures cooler and reducing light intensity and glare.

c. Economic Impact

On the negative side, these curtain systems are expensive to install at approximately \$13-14,000.00 per room. However, on the positive side, these curtain systems will minimize the wear and tear on our heating and cooling equipment, provide a much higher quality of light for plant growth, reduce the use of high intensity lighting, and eliminate the annual cost and labor to apply and to remove whitewash.

V. Outreach and Education

Many classes use the greenhouses on a weekly basis for class laboratories in the departments of NRES, Crop Sciences and Plant Biology. We also have students in Agricultural Engineering and Food Science who use our greenhouses for classes and research projects. Dozens of graduate students in NRES and Crop Sciences use the greenhouses for their masters and PhD research projects on an annual basis. At least half of the people we serve in the greenhouses are undergraduate and graduate students.

The students would not play a direct role in this project, but the faculty, staff and students conducting research or plant production in the greenhouses would benefit directly from the improved growing conditions provided by these energy/shade curtains.

Many faculty members in the Departments of NRES, Crop Sciences and Plant Biology utilize the greenhouses as part of their classroom curriculum by taking students on tours to teach them about greenhouse management and operations, having students grow plants in the greenhouses to teach plant production methods, or to teach them insect identification and integrated pest management methods.

The local media uses the greenhouses on a regular basis to cover research in progress, seasonal crops being grown such as poinsettias and spring bedding plants, and tropical plants spotlighted in the PSL Conservatory.

The PCF and Plant Biology greenhouse staff conduct dozens of tours each year to elementary, secondary, high school and junior college students to educate them about greenhouse operations and management, plant identification, and plant production methods. We also give dozens of tours to community groups, not-for-profit organizations, and private sector industry. These tours are wonderful opportunities to share the many ways the greenhouses are striving to reduce energy usage.

Greenhouse 1 – No Curtains

Greenhouse 1: Triangular: 50 ft x 25 ft

Heating Schedule

Jan 1 to Dec 31 During the Day: 75 During the Night: 65 °F

Heating Efficiency: 74%

Air Exchanges: 1.85 exchanges/hour

Fuel Types and Prices

Greenhouse 1: Steam at \$19.75 per lb

Total Heating Costs: \$13284

Total Heating Cost per Square Foot: \$10.63

Maximum BTU Draw on All Heaters: 351454 BTU/hour

Monthly BTU Usage and Heating Costs

Month	BTU	Heating Costs	Cost Per Square Foot
January	132786575	\$2657	\$2.13
February	103258959	\$2066	\$1.65
March	86917149	\$1739	\$1.39
April	43799225	\$876	\$0.7
May	25009415	\$500	\$0.4
June	6534793	\$130	\$0.1
July	3930054	\$78	\$0.06
August	4131970	\$82	\$0.07
September	14014609	\$280	\$0.22
October	40038462	\$801	\$0.64
November	76596083	\$1533	\$1.23
December	126662795	\$2535	\$2.03

Greenhouse 1 With Energy/Shade Curtains

Greenhouse 1: Triangular: 50 ft x 25 ft, with energy curtain

Heating Schedule

Jan 1 to Dec 31 During the Day: 75 During the Night: 65 °F

Heating Efficiency: 74%

Air Exchanges: 1.85 exchanges/hour

Fuel Types and Prices

Greenhouse 1: Steam at \$19.75 per lb

Total Heating Costs: \$10511

Total Heating Cost per Square Foot: \$8.41

Maximum BTU Draw on All Heaters: 351454 BTU/hour

Monthly BTU Usage and Heating Costs

Month	BTU	Heating Costs	Cost Per Square Foot
January	103732921	\$2076	\$1.66
February	82036172	\$1642	\$1.31
March	70023268	\$1401	\$1.12
April	35597726	\$712	\$0.57
May	20225399	\$404	\$0.32
June	5570118	\$111	\$0.09
July	3445866	\$68	\$0.06
August	3421124	\$68	\$0.05
September	11086886	\$221	\$0.18
October	30889202	\$618	\$0.49
November	59989530	\$1200	\$0.96
December	99091953	\$1983	\$1.59

	85%	78%
XLS 13 FIREBREAK	70%	65%
XLS 14 FIREBREAK	56%	53%
XLS 15 FIREBREAK	46%	43%
XLS 16 FIREBREAK	36%	34%
XLS 17 FIREBREAK	25%	24%
XLS 18 FIREBREAK	18%	17%

Solar Reflection Screens

XLS F FIREBREAK screens are necessary when too exist and maximum ventilation is desired. Hot air easi between the reflective aluminium strips. Closing the s temperatures by reflection radiation back toward the p leaf condensation.

Type	Light transmission	
	Direct	Diffuse
XLS 14 F FIREBREAK	59%	56%
XLS 15 F FIREBREAK	50%	47%
XLS 16 F FIREBREAK	39%	37%
XLS 17 F FIREBREAK	27%	27%
XLS 18 F FIREBREAK	19%	19%



CLIMATE CONTROL PRODUCTS

SVENSSON PRODUCTS

- INSIDE SCREENS
- OUTSIDE SCREENS
- OUTSIDE SCREENS FOR DOMESTIC USE
- SVENSSON SCREENS
- VARIABLE SCREENING
- SVENSSON SLIDE SYSTEM
- ENVIRONMENTAL CONTROL SYSTEMS

GREENHOUSE COVER

CIRCULATION FANS

(s, il) INSECT SCREENS

CAPILLARY MATS

GROUND COVER

LS Climate Control Pty Ltd
Phone: 61 2 9477 6955
Fax: 61 2 9477 5506
Email: info@livingshade.com.au

- HOME
- WHAT CLIMATE DO YOU NEED?
- GREENHOUSES
- GREENHOUSE PRODUCTS
- UPS & DOWNS
- NEWS

Inside Screens

Energy Saving Screens

Purpose: Energy savings, air humidity control.

SLS 10 ULTRA PLUS and XLS 10 FIREBREAK transparent screens are designed to retain the maximum amount of heat with a minimal loss of light. These screens are ideal for vegetable production in colder climates. The SLS 10 ULTRA PLUS screen contains light diffusing films promoting better light distribution and even leaf temperatures. The XLS 10 FIREBREAK screen is clear and saves more energy. The XLS Blackout FIREBREAK screen is a fully aluminium screen for maximum night time heat retention.



Type	Light transmission		Energy saving
	Direct	Diffuse	
SLS 10 ULTRA PLUS	88%	81%	43%
XLS 10 FIREBREAK	85%	78%	47%

Energy Saving, Solar Reflection Screens

Purpose: Energy saving, solar reflection

XLS FIREBREAK screens provide a prescribed level of shading by reflecting unwanted solar energy away from the crop. When closed at night, the screens trap heat beneath. Energy savings increase as aluminium content increases.

Type	Light transmission		Energy saving
	Direct	Diffuse	
XLS 10 FIREBREAK			



- HOME
- WHAT CLIMATE DO YOU NEED?
- GREENHOUSES
- GREENHOUSE PRODUCTS
- UPS & DOWNS
- NEWS

CLIMATE CONTROL PRODUCTS

SVENSSON PRODUCTS

- INSIDE SCREENS
- OUTSIDE SCREENS
- OUTSIDE SCREENS FOR DOMESTIC USE
- SVENSSON SCREENS
- VARIABLE SCREENING
- SVENSSON SLIDE SYSTEM
- ENVIRONMENTAL CONTROL SYSTEMS

GREENHOUSE COVER

CIRCULATION FANS

INSECT SCREENS

CAPILLARY MATS

GROUND COVER

Inside Screens

Energy Saving Screens

Purpose: Energy savings, air humidity control.

SLS 10 ULTRA PLUS and XLS 10 FIREBREAK transparent screens are designed to retain the maximum amount of heat with a minimal loss of light. These screens are ideal for vegetable production in colder climates. The SLS 10 ULTRA PLUS screen contains light diffusing films promoting better light distribution and even leaf temperatures. The XLS 10 FIREBREAK screen is clear and saves more energy. The XLS Blackout FIREBREAK screen is a fully aluminium screen for maximum night time heat retention.



Type	Light transmission		Energy saving
	Direct	Diffuse	
SLS 10 ULTRA PLUS	88%	81%	43%
XLS 10 FIREBREAK	85%	78%	47%

Energy Saving, Solar Reflection Screens

Purpose: Energy saving, solar reflection

XLS FIREBREAK screens provide a prescribed level of shading by reflecting unwanted solar energy away from the crop. When closed at night, the screens trap heat beneath. Energy savings increase as aluminium content increases.

Type	Light transmission		Energy saving
	Direct	Diffuse	
XLS 10 FIREBREAK			

LS Climate Control Pty Ltd
Phone: 61 2 9477 6955
Fax: 61 2 9477 5506
Email: info@livingshade.com.au

	85%	78%	47%
XLS 13 FIREBREAK	70%	65%	49%
XLS 14 FIREBREAK	56%	53%	52%
XLS 15 FIREBREAK	46%	43%	57%
XLS 16 FIREBREAK	36%	34%	62%
XLS 17 FIREBREAK	25%	24%	67%
XLS 18 FIREBREAK	18%	17%	72%

Solar Reflection Screens

XLS F FIREBREAK screens are necessary when too high greenhouse temperatures exist and maximum ventilation is desired. Hot air easily flows through the screen between the reflective aluminium strips. Closing the screen at night will elevate leaf temperatures by reflection radiation back toward the plants, inhibiting undesirable leaf condensation.

Type	Light transmission		Energy saving
	Direct	Diffuse	
XLS 14 F FIREBREAK	59%	56%	20%
XLS 15 F FIREBREAK	50%	47%	20%
XLS 16 F FIREBREAK	39%	37%	25%
XLS 17 F FIREBREAK	27%	27%	30%
XLS 18 F FIREBREAK	19%	19%	35%

Flame Retardant Screens

REVOLUX flame retardant screens deliver the same climate improvements as above, with added fire security. REVOLUX screens are typically required to meet building code standards for garden centres, production greenhouses, institutions and some commercial structures. XLS REVOLUX screens are suited for sliding and hanging systems whereas ILS REVOLUX screens are available for rolling applications.

Type	Light transmission		Energy saving
	Direct	Diffuse	
XLS 10 REVOLUX	84%	75%	45%
XLS 15 REVOLUX	45%	41%	55%
XLS 16 REVOLUX	37%	34%	60%
XLS 17 REVOLUX	31%	29%	65%
ILS 60 REVOLUX A/A/G	20%	17%	60%
XLS 17 F REVOLUX	31%	28%	27%

[For more information visit the Svensson company website](#)

EMAIL US

designed by **quantumdynamics**

powered by  **verve**



- [HOME](#)
- [WHAT CLIMATE DO YOU NEED?](#)
- [GREENHOUSES](#)
- [GREENHOUSE PRODUCTS](#)
- [UPS & DOWNS](#)
- [NEWS](#)

CLIMATE CONTROL PRODUCTS

SVENSSON PRODUCTS

- [INSIDE SCREENS](#)
- [OUTSIDE SCREENS](#)
- [OUTSIDE SCREENS FOR DOMESTIC USE](#)
- [SVENSSON SCREENS](#)
- [VARIABLE SCREENING](#)
- [SVENSSON SLIDE SYSTEM](#)
- [ENVIRONMENTAL CONTROL SYSTEMS](#)

GREENHOUSE COVER

CIRCULATION FANS

INSECT SCREENS

CAPILLARY MATS

GROUND COVER



Outside Screens

The OLS range of Svensson® screens is produced for shading greenhouses from the outside and protects against sun radiation, frost, hail, downpour and wind.

OLS ABRI external screens are suitable to protect outdoor crops against certain adverse weather conditions such as strong sunshine, night frost, hail, downpour and wind. The strong monofilament yarns used guarantee a long useful life, even under severe weather conditions.

The screen is reinforced in such a way that one can hang it onto polyester or steel wires with special synthetic suspension hooks. In this way the screen can be completely opened and closed so that it is possible to react adequately to changing weather conditions.

OLS ABRI screens consist of aluminium strips with open spaces in between these strips. The strips that reflect unwanted sun radiation and the open structure allow for sufficient airflow. The overall result of this is a considerable reduction of daytime crop temperature. As the aluminium strips reflect heat radiation from escaping the greenhouse, OLS ABRI screens increase the heat loss from the crop during night-time: As the plant temperature stays higher, the night frost damage will be limited to a minimum.



Screens closing



AVAILABLE TYPES AND TECHNICAL DATA

Type	Light		Transmission	Energy saving
	Direct	Diffuse		
OLS 35 ABRI	69%	61%		20%
OLS 50 ABRI	49%	42%		25%
OLS 60 ABRI	36%	30%		30%
OLS 70 ABRI	25%	25%		35%

Related Pages

[Solar Ultra Plastic Greenhouse Covers](#)



LS Climate Control Pty Ltd
 Phone: 61 2 9477 6955
 Fax: 61 2 9477 5506
 Email: info@livingshade.com.au

designed by **quantumdynamics**

powered by **verve**



- HOME
- WHAT CLIMATE DO YOU NEED?
- GREENHOUSES
- GREENHOUSE PRODUCTS
- UPS & DOWNS
- NEWS

CLIMATE CONTROL PRODUCTS

SVENSSON PRODUCTS

- INSIDE SCREENS
- OUTSIDE SCREENS
- OUTSIDE SCREENS FOR DOMESTIC USE
- SVENSSON SCREENS
- VARIABLE SCREENING
- SVENSSON SLIDE SYSTEM
- ENVIRONMENTAL CONTROL SYSTEMS

GREENHOUSE COVER

CIRCULATION FANS

INSECT SCREENS

CAPILLARY MATS

GROUND COVER

Outside Screens for Domestic Use

Solar Reflection Screens

OLS screens are designed to withstand and protect against elements of direct outdoor exposure including harsh sun, wind, hail and heavy downpours. OLS screens are commonly used in a fixed manner or in rolling applications over verandahs, patios and courtyards.


OLS screens consist of aluminium strips with open spaces in between these strips. The strips reflect unwanted sun radiation and the open structure allows for sufficient airflow.

The overall result of this is a considerable reduction of temperature under the covered area and you can feel up to 12oC cooler. At night-time as the aluminium strips reduce heat radiation from the area, OLS screens decrease the heat loss and you will feel up to 6oC warmer.


The same process occurs with all our outside living areas and everybody under these screens feel the immediate cooling effect and say "What a great product".



City Patios using fixed aluminium screens

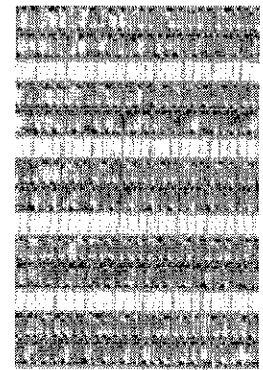

Close up of OLS Screen



Type	Light transmission		Energy saving
	Direct	Diffuse	
OLS 50	49%	42%	20%
OLS 60	36%	30%	25%
OLS 70	25%	25%	30%

[For more information visit the Svensson company website](http://www.svensson.com.au)

LS Climate Control Pty Ltd
 Phone: 61 2 9477 6955
 Fax: 61 2 9477 5506
 Email: info@livingshade.com.au

INSIDE

Type of screen	Svensson* Screen	Direct transmission %	Diffused transmission %	Energysaving %	Type installation
SVENSSON* ENERGY SAVING SCREENS	SLS 10 ULTRA PLUS	88	81	43	SH
	XLS A/A	3	3	75	SH
	XLS 10	85	78	47	SH
SVENSSON* ENGERGY SAVING SOLAR REFLECTION SCREENS	XLS 13	70	65	49	SH
	XLS 14	56	53	52	SH
	XLS 15	46	43	57	SH
	XLS 16	36	34	62	SH
	XLS 17	25	24	67	SH
	XLS 18	18	17	72	SH
SVENSSON* SOLAR REFLECTION SCREENS	XLS 14 F	59	56	20	SH
	XLS 15 F	50	47	20	SH
	XLS 16 F	39	37	25	SH
	XLS 17 F	27	27	30	SH
	XLS 18 F	19	19	35	SH
SVENSSON* FLAME RETARDANT SCREENS	XLS 10 REVOLUX	84	75	45	SH
	XLS 15 REVOLUX	44	39	55	SH
	XLS 16 REVOLUX	37	34	60	SH
	XLS 17 REVOLUX	31	29	65	SH
	XLS 15 F REVOLUX	46	43	20	SH
	XLS 17 F REVOLUX	33	31	30	SH
	XLS 17 REVOLUX A/G	30	27	65	SH
	XLS 17 REVOLUX A/BLUE	30	27	65	SH
	XLS 17 REVOLUX A/Y	30	27	65	SH
	XLS 17 REVOLUX A/O	30	27	65	SH
	ILS 60 REVOLUX A/A/G	20	17	60	R
	ILS 70 REVOLUX A/A/G	16	13	65	R
	XLS OBSC. REV. A/B+B/B	<0,1	<0,1	75	SH
SVENSSON* BLACKOUT SCREENS	XLS OBSCURA A/B+B/B	<0,1	<0,1	75	SH
	XLS OBSCURA A/B+B/W	<0,1	<0,1	75	SH
	LS 100	<0,1	<0,1	43	SH
SVENSSON* ASSIMILATION SCREENS	XLS OBSCURA B/W	<1	<1	40	SH
	XLS OBSCURA 19 W/W	11	10	40	SH
SVENSSON* ROLLING SCREENS	ILS ULTRA	87	77	45	R
	ILS 40 ULTRA	63	56	50	R
	ILS 50 ULTRA	48	43	55	R
	ILS 60 ULTRA	34	31	60	R
	ILS 70 ULTRA	25	20	65	R
	ILS 80 ULTRA	22	21	70	R
	ILS A/A	3	4	70	R
	ILS CLEAR	83	77	47	R
	ILS HORTIROIL A/W/G	0	0	70	R
SVENSSON* BLACKOUT ROLLING SCREENS	ILS HORTIROIL W/W	0	0	70	R

OUTSIDE

SVENSSON* SOLAR REFLECTION SCREENS	OLS 50	49	42	20	R
	OLS 60	36	30	25	R
	OLS 70	25	25	30	R
	OLS 35 ABRI	69	61	20	H
	OLS 50 ABRI	49	42	25	H
	OLS 60 ABRI	36	30	30	H
	OLS 70 ABRI	25	25	35	H
SVENSSON* GREENHOUSE COVER	OLS ABRI	79	71		H
	LS SOLARWOVEN ULTRA	85	78		R
	LS SOLARWOVEN GREEN	46	36		R

INSECT NET

Type of net	Svensson* Screen	Direct transmission %	Diffuse transmission %	Opening	Ventilation reduction
SVENSSON* INSECT NET	LS ECONET B	90	82	1,00 x 4,00	5%
	LS ECONET F	90	77	0,45 x 0,78	25%
	LS ECONET L	84	76	0,60 x 0,60	25%
	LS ECONET M	90	79	0,40 x 0,45	30%
	LS ECONET T	85	79	0,15 x 0,35	40%
	LS ECONET SF	88	75	0,28 x 0,78	30%
	LS ECONET S	91	76	0,15 x 0,15	45%

GROUND COVER

Type of groundcover	Svensson* Screen	Standardwidth (m)	Water permeability
SVENSSON* GROUND COVER	LS GROUND COVER WHITE	3,30/3,50/4,15/5,15	8,0 l/m ² /s
	LS GROUND COVER BLACK	3,30/3,50/4,15/5,15	9,0 l/m ² /s
	LS GROUND COVER BLACK PLUS	3,30/4,15/5,15	8,0 l/m ² /s


Type of installations: S = Sliding H = Hanging R = Rolling

LS Fabrics for Interior VRE Shade & Save Systems


Available types and technical data:

Type	Light transmission		Energy saving
	Direct	Diffuse	
XLS 10	85%	78%	47%
XLS 13	70%	65%	49%
XLS 14	56%	53%	52%
XLS 15	46%	43%	57%
XLS 16	36%	34%	62%
XLS 17	25%	24%	67%
XLS 18	18%	17%	72%


XLS 10




XLS 15




XLS 13




XLS 16




XLS 14



XLS 17



XLS 18



Standard widths:

3.20, 3.50, 4.30, 4.70 and 5.30m; other widths available on demand.

Warranty:

5 years under all types of house covering, also UV-transparent, as per Svensson limited warranty in writing.

ENG **Purpose:** Energy saving, Solar reflection.

Characteristics:

XLS is made of 4mm wide aluminium and polyester strips held together with a strong polyester filament yarn. Special aluminium and polyester give XLS its superior reflection and transmission efficiency. This guarantees a low daytime temperature as well as very high energy savings, and keeps the crop temperature close to the ambient temperature during the night. The result is a better climate in the greenhouse with minimum risk for dew formation on the leaves, reducing disease problems and lowering the energy costs.

The knitted structure allows sufficient water vapour to pass through, preventing condensation drops to form on the underside of the screen. The flexible structure also allows the screen to be folded into a very small package in an open position, making a maximum light transmission possible.

XLS is an inside screen for all types of greenhouses and greenhouse covering materials. It is used for overhead installations, sliding as well as hanging.

As XLS is a highly UV stabilised product with excellent antistatic properties, the screen will stay clean and efficient for many years. The applied UV stabilisers are resistant to all common chemicals used in greenhouses.

The above information is given in good faith, but without warranty. Freedom from patent rights and registered trademarks must not be assumed.

Svensson is a registered trademark owned by AB Ludvig Svensson.

TOP SYSTEMS - SHADE
REGULAR FABRIC

TOP SYSTEMS - SHADE
FIRE RETARDANT FABRIC

ENG Purpose: Fire security, Energy saving, Solar reflection, Decoration.

Characteristics:

XLS REVOLUX screens are meant for situations where fire security is of great importance, for example in public areas. Opposed to most other screens used in the horticulture industry, these screens are manufactured from 100% flame retardant materials. Test reports by institutions from various countries concerning the fire resistant properties are available.

XLS REVOLUX is made of 4mm wide aluminium and polyester strips held together with a strong polyester filament yarn. Special aluminium and polyester give XLS REVOLUX its superior reflection and transmission efficiency. This guarantees a low daytime temperature as well as very high energy savings, and keeps the crop temperature close to the ambient temperature during the night. The result is a better climate in the greenhouse with minimum risk for dew formation on the leaves, reducing disease problems and lowering the energy costs.

The knitted structure allows sufficient water vapour to pass through, preventing condensation drops to form on the underside of the screen. The flexible structure also allows the screen to be folded into a very small package in an open position, making a maximum light transmission possible.

XLS REVOLUX is an inside screen for all types of greenhouses and greenhouse covering materials. It is used for overhead installations, sliding as well as hanging.

As XLS REVOLUX is a highly UV stabilised product with excellent antistatic properties, the screen will stay clean and efficient for many years. The applied UV stabilisers are resistant to all common chemicals used in greenhouses.

The above information is given in good faith, but without warranty. Freedom from patent rights and registered trademarks must not be assumed.

Svensson is a registered trademark owned by AB Ludvig Svensson.

Available types and technical data:

Type	Light transmission		Energy saving
	Direct	Diffuse	
XLS 10 REVOLUX	84%	75%	45%
XLS 15 REVOLUX	53%	49%	55%
XLS 16 REVOLUX	37%	34%	60%
XLS 17 REVOLUX	31%	29%	65%

XLS REVOLUX is also available in four different colours: orange, yellow, blue and green.

Standard widths:

3.50 m; other widths available on demand.

Warranty:

5 years under all types of house covering, also UV-transparent, as per Svensson limited warranty in writing.

ROLLING SCREENS

ILS Ultra
ILS 50 Ultra
ILS 60 Ultra
ILS 70 Ultra
ILS ALU

Purpose: Solar reflection
Energy saving

ILS roller screens are specially designed for use in roller screen installations intended for screening both the roof, the outer and separating walls of your greenhouse. The rigid structure ensures problem-free rolling up and down, even on frequent use.

A sophisticated combination of aluminium and transparent strips makes these screens suitable for both solar reflection and energy saving. The aluminium reflects sharp sunlight and retains heat radiation at night. The result is a more uniform growth climate for your crop, a more agreeable working climate for your personnel and appreciable savings on heating cost at night.

By using ILS roller screens along the outer walls of your house you will avoid undesirable horizontal temperature differences.

SIDE WALL ROLL-UPS
NON FIRE RETARDANT

Warranty:
As per LS written 5 year limited warranty.

Standard widths:
1.90, 2.10, 2.30 and 4.20 m.
NB: By cutting or sewing, virtually any required width can be supplied.

Technical data:

Type	Shade value	Energy saving
ILS Ultra	20%	43%
ILS 50 Ultra	50%	55%
ILS 60 Ultra	65%	60%
ILS 70 Ultra	75%	65%
ILS ALU	99%	75%

Assembly instructions available on request.

The above information is given in good faith, but without warranty.
Freedom from patent rights and registered trade marks must not be assumed.

"REVOLUX" is the registered trade name for Ludvig Svensson flame retardant screens. All other Ludvig Svensson screens are not flame retardant.

ILS REVOLUX

SIDE WALL ROLL UP
FIRE RETARDANT
SHADE FABRIC

ENG **Purpose:** Fire security, Energy saving, Solar reflection, Decoration.

Characteristics:

ILS REVOLUX rolling screens are specially designed for use in roller screen applications, for greenhouse roofs, outer and dividing walls. The strengthened knit structure ensures a smooth rolling up and down of the screen, even after frequent use.

ILS REVOLUX rolling screens are meant for situations where fire security is of great importance, for example in public areas like retail nurseries.

ILS REVOLUX screens are made of aluminium and transparent synthetic strips. In a closed position the screen retains the radiant and convective heat. This results directly into energy savings. The ILS REVOLUX screens also reflect the required amount of the sun's radiation, protecting the crop from fierce radiation and stressful temperatures. Both of these properties result in a more comfortable working climate for the crop, public and personnel.

In order to achieve a decorative effect, ILS REVOLUX uses a green monofilament.

Condensation will not occur, therefore the screen will remain algae free and clean for many years.

The above information is given in good faith, but without warranty. Freedom from patent rights and registered trademarks must not be assumed.

Svensson is a registered trademark owned by AB Ludvig Svensson.

Available types and technical data:

Type	Light transmission		Energy saving
	Direct	Diffuse	
ILS 60 A/A/G REVOLUX	20%	17%	60%
ILS 70 A/A/G REVOLUX	16%	13%	65%

ILS REVOLUX can be supplied in an F version, which is open to increase the ventilation.

Standard widths:

1.40, 1.90, 2.10, 2.30 and 4.20 m. Other widths available on demand.

Warranty:

5 years under all types of house covering, also UV-transparent, as per Svensson limited warranty in writing.

TOP SYSTEMS-
BLACK-OUT

XLS OBSCURA A/B + B/B and A/B + B/W

ENG **Purpose:** Day length control, Energy saving

Characteristics:

The XLS OBSCURA screens consist of two layers: a 100% aluminium top layer and a black bottom layer. For all sensitive crops needing day length control, like chrysanthemum, kalanchoe or euphorbia, the blackout effect is more than sufficient, with light transmission <0.1%.

Sunlight is reflected by the aluminium upper surface. Therefore when the weather is sunny, undesired heat accumulation is excluded during blackout periods.

Even with two layers of material, the folded package is very small in opened position. This permits a maximum amount of light to reach the crops.

XLS OBSCURA screens allow for sufficient water vapour permeation. Closing the screen therefore leads to a minimal rise of the air humidity and condensation drops do not form on the underside of the screen.

There are two types of XLS OBSCURA screens available:

XLS OBSCURA A/B + B/B: The bottom layer is black

XLS OBSCURA A/B + B/W: The bottom layer is black on the top and white on the bottom.

This white surface allows for 60% light reflection, therefore in combination with artificial light, a 3 to 5% increase in the amount of light may be achieved.

The above information is given in good faith, but without warranty. Freedom from patent rights and registered trademarks must not be assumed.

Svensson is a registered trademark owned by AB Ludvig Svensson.

Available types and technical data:

Type	Light transmission		Energy saving
	Direct	Diffuse	
XLS OBSCURA A/B+B/B	<0.1%	<0.1%	75%
XLS OBSCURA A/B+B/W	<0.1%	<0.1%	75%

Standard widths:

3.20, 3.50, 4.30 and 4.70m; other widths available on demand.

Warranty:

5 years under all types of house covering, also UV-transparent, as per Svensson limited warranty in writing.

SIDE WALL ROLL-UPS
BLACK-OUT

ILS HORTIROLL A/W – W/W

ENG **Purpose:** Blackout, Energy saving, Light reflection.

Characteristics:

ILS Hortiroll is a rolling screen, specially designed to blackout the sidewall of a greenhouse. It is also used as a dividing wall between greenhouse sections. One can make a blackout installation complete, by combining the ILS Hortiroll rolling screen with a horizontal Svensson Obscura screen.

There are two versions of the ILS Hortiroll: ILS Hortiroll A/W is used for sidewalls. It has an aluminium outer surface and a white inner surface. A green monofilament yarn gives the outside surface a more natural and decorative effect. ILS Hortiroll W/W is used for dividing walls. This rolling screen is white on both sides.

ILS Hortiroll is also the right choice when you are obliged to maintain artificial light within the greenhouse. The white surface reflects light back diffused onto the crop, ensuring uniform crop development.

The above information is given in good faith, but without warranty. Freedom from patent rights and registered trademarks must not be assumed.
Svensson is a registered trademark owned by AB Ludvig Svensson.

Available types and technical data:

Type	Light transmission		Shade value	Energy saving
	Direct	Diffuse		
ILS Hortiroll A/W	0%	0%	100%	70%
ILS Hortiroll W/W	0%	0%	100%	70%

Standard widths:

1.90m and 2.40m

Warranty:

5 years under all types of house covering, also UV-transparent, as per Svensson limited warranty in writing.

INSECT SCREENING

ENG Purpose: Keep out harmful insects, Retain useful insects.

Characteristics:

LS ECONET insect nets are woven from UV-stabilised polyethylene and acrylic yarns. These materials guarantee a long working life even when used outside.

In order to offer an adequate solution for every situation, there are six different types available. Each type with a different hole size.

Various types of LS ECONET have rectangle openings instead of square openings. The advantage is that with a similar protection grade against insects, there is more open surface available than with square openings, resulting in better ventilation.

Available types and technical data:

Type	Light transmission		Hole size mm	Ventilation reduction
	Direct	Diffuse		
LS ECONET B	90%	82%	1.0x4.0	5%
LS ECONET F	90%	77%	0.45x0.78	25%
LS ECONET L	84%	76%	0.60x0.60	25%
LS ECONET M	90%	79%	0.40x0.45	30%
LS ECONET T	85%	79%	0.15x0.35	40%
LS ECONET SF	88%	75%	0.28x0.78	30%

Standard widths:

LS ECONET B	4.20m
LS ECONET L	3.20m
LS ECONET M	2.00 and 3.30m
LS ECONET S and T	3.40m
LS ECONET F and SF	3.15m

Other widths available on demand.

Warranty:

Outdoor use 3 years. 5 years under all types of house covering, also UV-transparent, as per Svensson limited warranty in writing.

The above information is given in good faith, but without warranty. Freedom from patent rights and registered trademarks must not be assumed.

Svensson is a registered trademark owned by AB Ludvig Svensson.